
TECHNICAL SPECIFICATIONS OFAGRICULTURAL IMPLEMENTS

47. COTTON BOLL STRIPPER

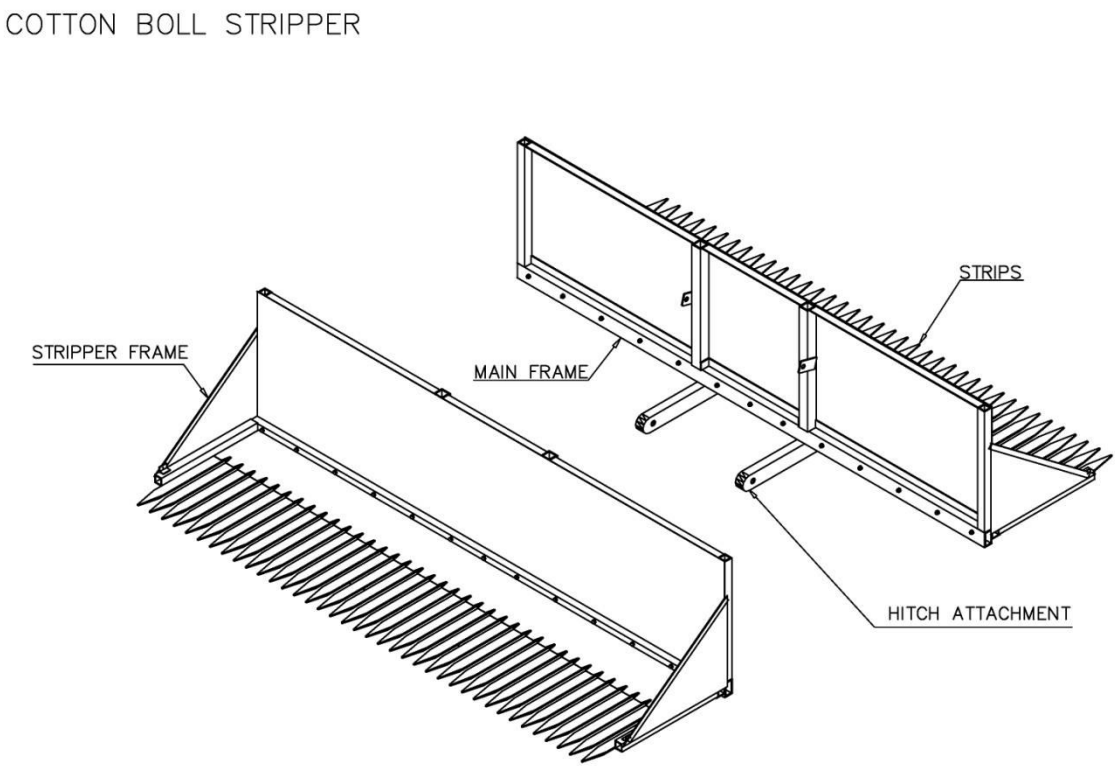

General

1)	Applications	For collection of bolls from remaining cotton crop after last picking
2)	Type	Tractor front mounted
3)	Tractor Power	50 + hp
4)	Working Width	2640 mm

Overall Dimensions

5)	Length	1180 ± 50mm
6)	Width	2725 ± 100mm
7)	Height	760 ± 20mm

Material Specifications

8)	Main frame	MS box 75x43x 6 mm , 02 Nos. side supports of MS box 42x42x6 mm , 02 Nos. center supports of MS box 50x50x6 mm MS angle 38x38x4 mm welded on top and MS flat 38x4 mm welded on bottom
9)	Hitch attachment	02 Nos. MS rectangular box 75x43x6 mm, 920 mm long and 100 mm tapered at ends

TECHNICAL SPECIFICATIONS OFAGRICULTURAL IMPLEMENTS

10)	Stripper Frame	MS box 40x40x6 mm bolted with 12 Nos. of bolts of size12 mm bolted with main frame, 02 Nos. of pins 18 mm dia. for support 14 gauge MS sheet, welded at front and sides
11)	Stripes	762x50x4.5 mm T.iron welded with stripper frame with front tapered 120 mm and 4 mm tip size MS sheet 14 gauge 250mm wide, welded on rear end of stripper frame
12)	Tractor Attachment (Front)	25 mm thick MS plate bolted with tractor frame, 9 mm MS plate welded for support pulley MS box 50x50x6 mm with adjustment holes MS plate 75x16 mm attached with main frame through 25 mm pins
13)	Pulley for wire Rope	04 Nos. 90 mm dia, flexible wire rope dia. 10 mm
14)	Rear hydraulic link	L shaped 460x235 mm, made of 50x6 mm MS angle hinged at place of lower links with wire rope tightener

Miscellaneous

15)	Paint	Double coat with primer after surface finish
16)	Nuts and Bolts	To be tightened with spring washers
17)	Minor modifications	To be carried out free of cost if required
18)	Warranty	Free : 1 year for parts and service